
## Processed cheese packaging machine **KUSTNER YH60**



Reconditioned machine, it is intended for dosing and packing of processed cheese portions into aluminium foil.

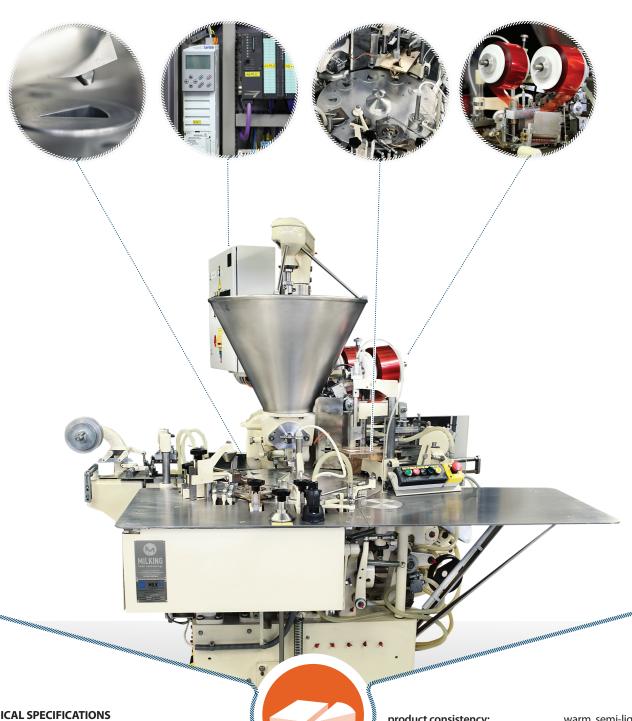

## **TECHNICAL SPECIFICATIONS**

nominal weight of portions: machine layout dimensions: weight of the machine: machine capacity: production control: method of dosing:


17,5 g 2 500 x 1 890 x 1 910 mm 1 650 kg up to 80 pc/min continous volumetric

product consistency: temperature of dosing product: room temperature: room RH: dosing accuracy: wrapping material: max. installed power of machine: warm, semi-liquid 75°C - 90°C 15 – 25°C not more than 70% ± 2% aluminium foil 3,5 kW

There are several possibilities as far as shape and weight of packed portion, for example triangular (weights typically from 12 g to 35 g), squared and/or rectangular (weights typically from 17,5 g to 100 g)



As an option we supply a machine with new Easy opening system (tear cell) for inserting of red tape into a packed portion for easy opening of the portion.

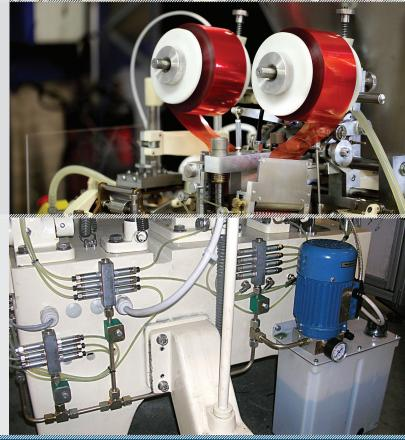

As an option we supply automatic central lubrication system integrated in the packaging machine.

## www.milking.sk

- Cooking machines: Stephan, Vogele
- Other types of Kustner machines: Kustner Gemini, Kustner Delta
- Easy opening systems
- Banderolling machines
- Turn key projects for Processed cheese plants





## **MANUFACTURER**

MILKING spol. s r.o., Studená 21, 821 04 Bratislava, Slovakia tel.: +421 2 444 55 55 315, -6, -8, -9 e-mail: bratislava@milking.sk web: www.milking.sk